


R-2.0

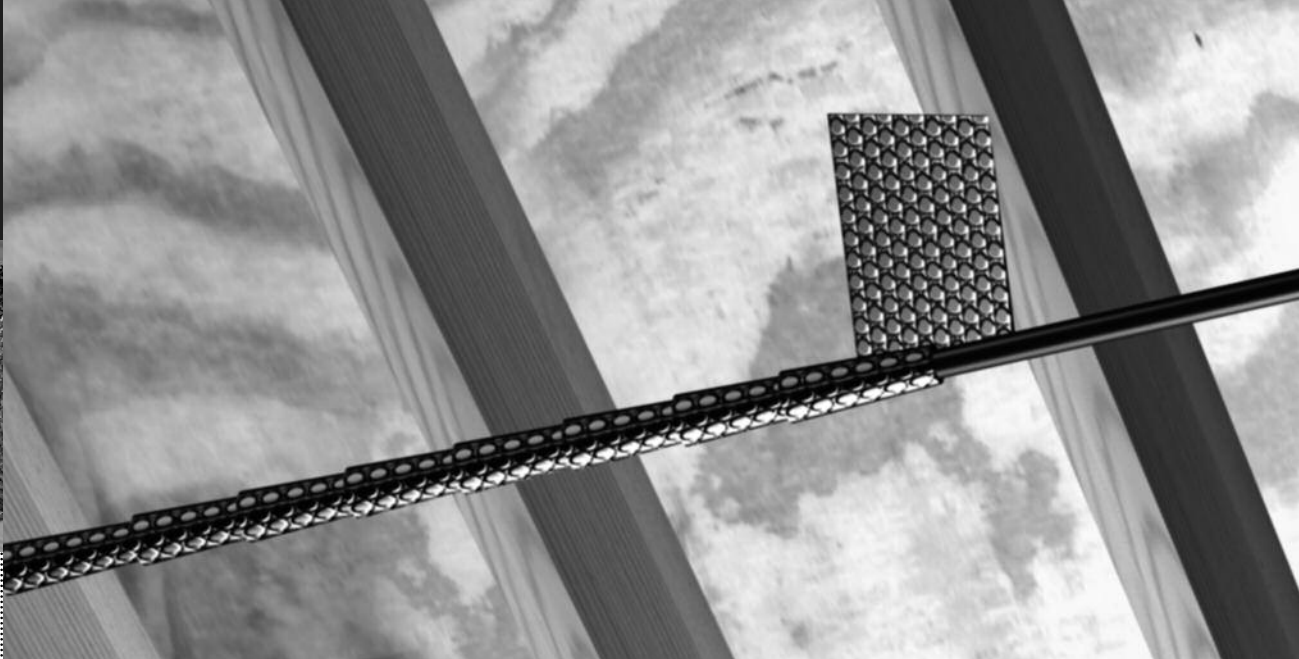

Features AT A GLANCE:

Reduces condensation
on cold pipes

Reduces heat loss
on hot pipes

WAREHOUSE LOCATIONS:

Markleville, IN

Phoenix, AZ

Greenville, SC

Needham, MA

Reflectix, Inc.

#1 School St. (PO Box 108)

Markleville, IN 46056

(800) 879-3645

Fax: (765) 533-2327

www.reflectixinc.com

SPIRAL PIPE WRAP

Reflectix® Reflective/Bubble products for pipe wrap applications are the clear winner when it comes to ease of installation. It has an R-value of R-2.0 and also reduces condensation on cold pipes. The product does not create fibers or dust that would require protective garments or a respirator. The rolls are a very friendly size and can easily be molded or cut to your specific application.

PRODUCT DESCRIPTION

Reflectix® Pipe Wrap consists of two 94%+ reflective layers of film bonded to two internal layers of heavy gauge polyethylene bubbles.

REFLECTIX® SPIRAL PIPE WRAP PART NUMBERS AND STOCK SIZES

- HVSPW02025 (2" x 25')
- HVSPW04025 (4" x 25')
- HVSPW06025 (6" x 25')
- HVSPW09025 (9" x 25')

BENEFITS

- Lightweight and easy to install
- Non-toxic / non-carcinogenic
- Fiber-free

APPLICATIONS

Reflectix® Pipe Wrap may be installed by spiraling or wrapping hot and cold water pipes.

Double Reflective Technical Data:

Temperature Range:	-60° to 180° F
Nominal Thickness:	5/16 inch (.312)
Weight:	0.771 oz./sq. ft.
Flame Spread Index (ASTM E 84):	Less than 25
Smoke Developed Index (ASTM E 84):	Less than 50
Mounting Method (ASTM E 2599)	
Fire Rating:	Class A/Class 1
Linear Shrinkage:	None
Reflectance (IR):	94%+
Water Vapor Transmission (ASTM E 96):	0.02
Puncture Resistance:	60 lb./in.
Mold and Mildew:	No Growth
Emittance:	Less than 0.06
Tensile Strength:	3.7 N/mm
Pliability:	No Cracking
Hot Surface Performance:	Passed (250° F)

Note: Not for use in direct contact on surface temperatures that are 180° F or greater.




Reflectix® Duct Insulation Products
are ETL and Warnock Hersey Listed.

- Resists growth of fungi, mold and mildew
- Not affected by moisture or humidity
- ISO 9001:2008 certified manufacturing location

TESTING & CERTIFICATIONS

- Thermal Performance ASTM C518
- Hot Surface Performance ASTM C411
- Heat Transfer (Heat Flow Up, Down, Horizontal) ASTM C1363
- Flame Spread and Smoke Density ASTM E84
- Mounting Method ASTM E2599
- Fungus Resistance Mil-Std 810B Method 508
- Pliability Test ASTM C1224
- Water Vapor Transmission ASTM E96
- Tensile Strength ASTM D751
- Emittance Testing ASTM C1371
- Thermal Performance of Water Heater Jackets
- Intertek: Surface Burning Characteristics of Building Materials ASTM E84 (Taped Joint Detail) Test Report # 3166908SAT-012
- Intertek: Surface Burning Characteristics of Building Materials ASTM E84 (Unslit) Test Report # 3166908SAT-011
- R&D Services: Resistance to the Growth of Fungi ASTM C1338 Test Report # RD072713FR
- State of California
- State of California Licensed Insulation Manufacturer
- State of Minnesota: Filed with Minnesota Insulation Standards Program

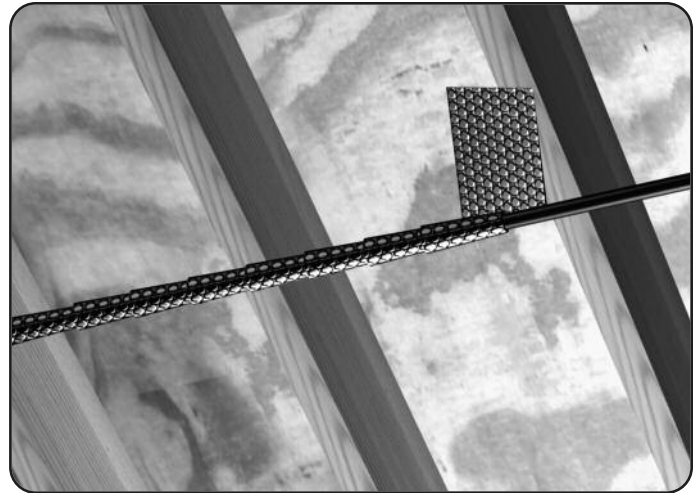

- State of Wisconsin: Wisconsin Material Approval, Safety and Buildings Division Approval # 920088-1
- R&D Services Emittance Testing
- R&D Services: Physical Properties Sheet Width, Length, Pliability, Water Vapor Permanence and Aged Water Vapor Permanence
- R&D Services: Water Vapor Transmission Test ASTM E96 (Dessicant Method)

MANUFACTURER'S SUGGESTED INSTALLATION INSTRUCTIONS

Note: Installation instructions and illustrated drawings are recommendations only, while proper local construction methods are the responsibility of the installer.

SPIRAL PIPE WRAP

- Spiral wrap the product overlapping a minimum of 1/2" inch.
- Securely tape the seams with a Reflectix® Foil Tape (goal is an air-tight, snug seam seal).

